


PILLOW PIPE STOPPERS



Distributed by JaegerTech Corp, Holly Hill, Florida USA
www.JaegerTechCorp.com 386-333-9372

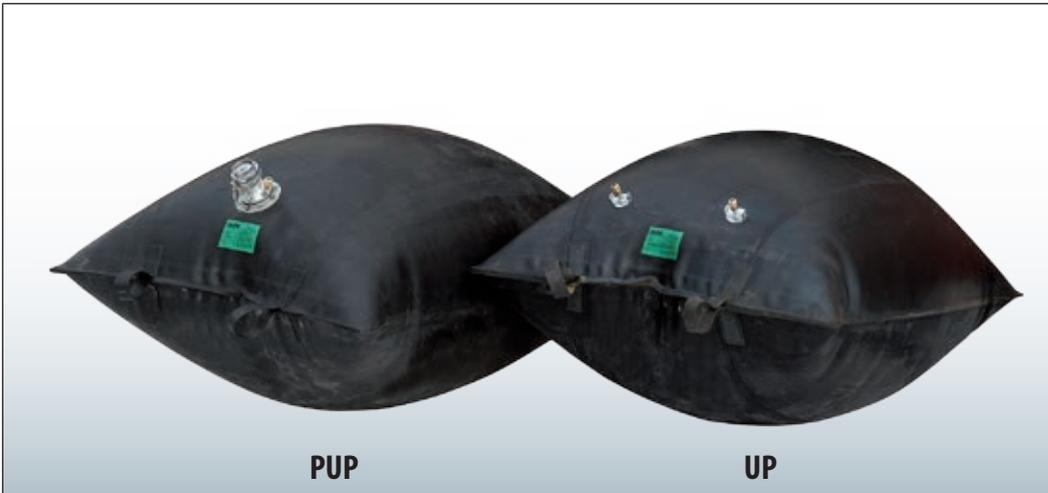

These pillow shaped pipe stoppers are mainly used in sanitary sewers and storm sewers. Their advantage is in their ability to be inserted into the pipe through standard 24" manholes. The special Kevlar reinforcement enables us to manufacture these stoppers in large diameters. The standard product line fits pipes from 40" to 88" inches in diameter.

Pillow Pipe Stoppers UP, PUP

Type		UP 100/140	UP 140/180	UP 180/220	PUP 100/140	PUP 140/180	PUP 180/220
Part - No.		1110	1111	1112	1225	1226	1227
Pipe diameter	inches	40"-56"	56"-72"	72"-88"	40"-56"	56"-72"	72"-88"
Operating pressure	PSI	10	8.4	7	10	8.4	7
Test pressure	PSI	14	11	9	14	11	9
Back pressure	PSI	7	7	7	7	7	7
Width of pillow	inches	58	82	106	58	82	106
Length of pillow	inches	92	128	156	92	128	156
Weight	Lbs	89	161	254	95	170	265
Bypass					2"	2"	2"

TEST STOPPERS FOR GULLIES



These short, light and easy-to-handle stoppers are used for leak tests of standard gullies using water or air as the testing medium according to DIN EN 1610. The accessories are identical with common pipe stoppers. If required, we are able to manufacture the stopper of a different shape or size. They are standard and light – L.

Test Stoppers for Gullies US, US-L

Type		US 60/65	US 60/65 L	US 80/85 L	US 100/105 L
Part - No.		9028	9038	9116	9117
Pipe diameter	mm	600–650	600–650	800–850	1000–1050
Operating pressure	bar	1,5	1,0	1,0	1,0
Diameter	mm	560	580	780	980
Cylinder length	mm	300	200	200	200
Weight	kg	19	4,9	7,2	10
Bypass		2"	2"	2"	2"